


Logitech G Saitek Pro Pedal Refit



Time required is about 15 minutes, and you will need a suitable screwdriver and a pot or magnet to retain the screws.



Press the pedal selector down and slide the top section upwards.

Do this until the top slides free.

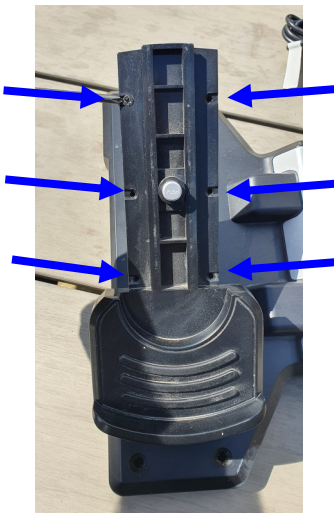

Locate and remove the 6 screws. Three on each side, the blue arrows show the locations.

Slide the bottom section downwards (green arrow direction) until it is free. Do NOT attempt to lift this part straight up, as it is hooked onto the bottom section

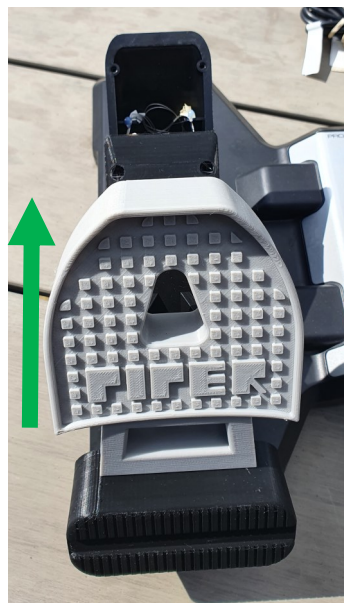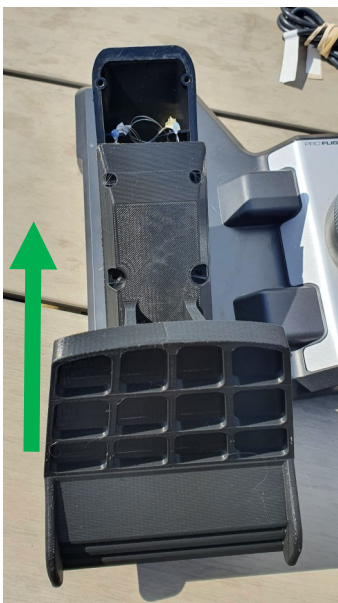

Lay the new pedal on top and slide upwards (Green arrow direction) until hooked. Refit the top four screws.— ensuring the cables are free and not trapped.

For the Piper Pedal you access the lower two screws via the hole in the peddle

NOTE: All pedal conversions are assembled the same way. Some pedal kits use four of the original screws, some use six.

Boing, PA28, DC3, Cessna, 208, Combat, and more to come...



That's it, enjoy the real feel of heels on the floor flying.

www.mimics.strollerweb.co.uk